


FTTH COMPACT WALL OUTLET

W0001 & W0002


The compact termination box supplied by DYNAMIX is designed to use in residential and business applications for the termination of up to 4x fibres. This wall box enables the installation of either a single Sirocco Blown Tube cable using up to a 2x fibres blown unit or two 2x fibres rugged cables to be spliced to 2x SC pigtails (PC or APC), which connect to adapters at the base of the unit. This box is supplied with a transparent plastic cover on the front adaptor side, providing major protection to the installed fibres. The unit can be quickly installed within an office, house or communication room environment.



Clear Plastic Cover

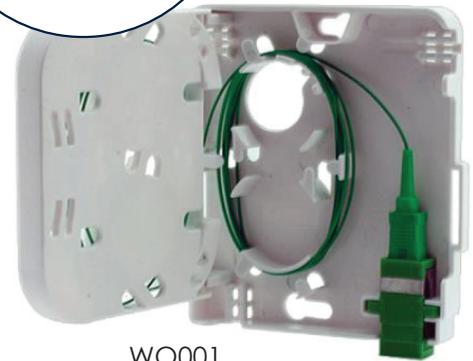

W0001

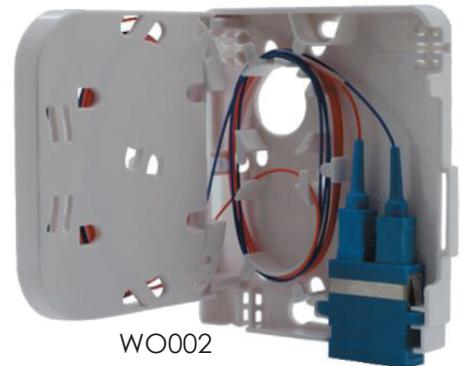

W0002

FEATURES:

- SC Simplex/Duplex Adapter type.
- Ergonomic Design.
- Flip tray to allow access to pigtails and Cable entry.
- Removable cover for easy access.
- Unit manufactured with fire resistant
- UL94-VD Rated Material.
- Transparent lid cover for shutter

APPLICATION:

- FTTH / FTTx Networks.
- Data communication Networks.
- Indoor Application

TECHNICAL SPECIFICATIONS

PARAMETERS	VALUE
Width	85mm
Height	23mm
Depth	116mm
N° of Port	1
Max. Splicing Capacity	2 Splices
Suitable Adapter Type	SC Simplex – SC Duplex
Material	PC + ABS
Operating Temperature	-40°C ~+50°C
Colour	White
Compliant to	RoHS, REACH, SvHC

CODE	DESCRIPTION
W0001	FTTH Compact Wall Outlet 1 Port SC Simplex/LC Duplex Up to 4 fibres, Unloaded
W0002	FTTH Compact Wall Outlet 1 Port SC Duplex/LC Quad, Up to 4 fibres, Unloaded