



Human friendly

DisplayPort 1.4 Zinc Alloy Cable


Support up to 8K 60Hz

Model: C1606BNI/ C1607BNI/ C1608BNI/ C1609BNI

Cable Length: 1M/ 1.5M/ 2M/ 3M

Products Features:

- Support up to 8K (7680x4320@60HZ). Backward compatible.
- The refresh rate is up to 240Hz while using Full HD resolution.
- Support for high-bandwidth HBR3, 32.4 Gbps bandwidth, Display Stream Compression 1.2 (DSC1.2), High Dynamic Range (HDR), FEC forward error correction, and maximum 32 audio channels.
- Built with premium Zinc-alloy housing and high-quality nylon braided jacket for enhancing the strongness and durability.
- With the gold-plated connectors, bare copper conductors, and foil & braid shielding, providing both superior cable performance and reliable connectivity.
- With a latch on the connector, providing a secure connection that must be depressed before unplugging.

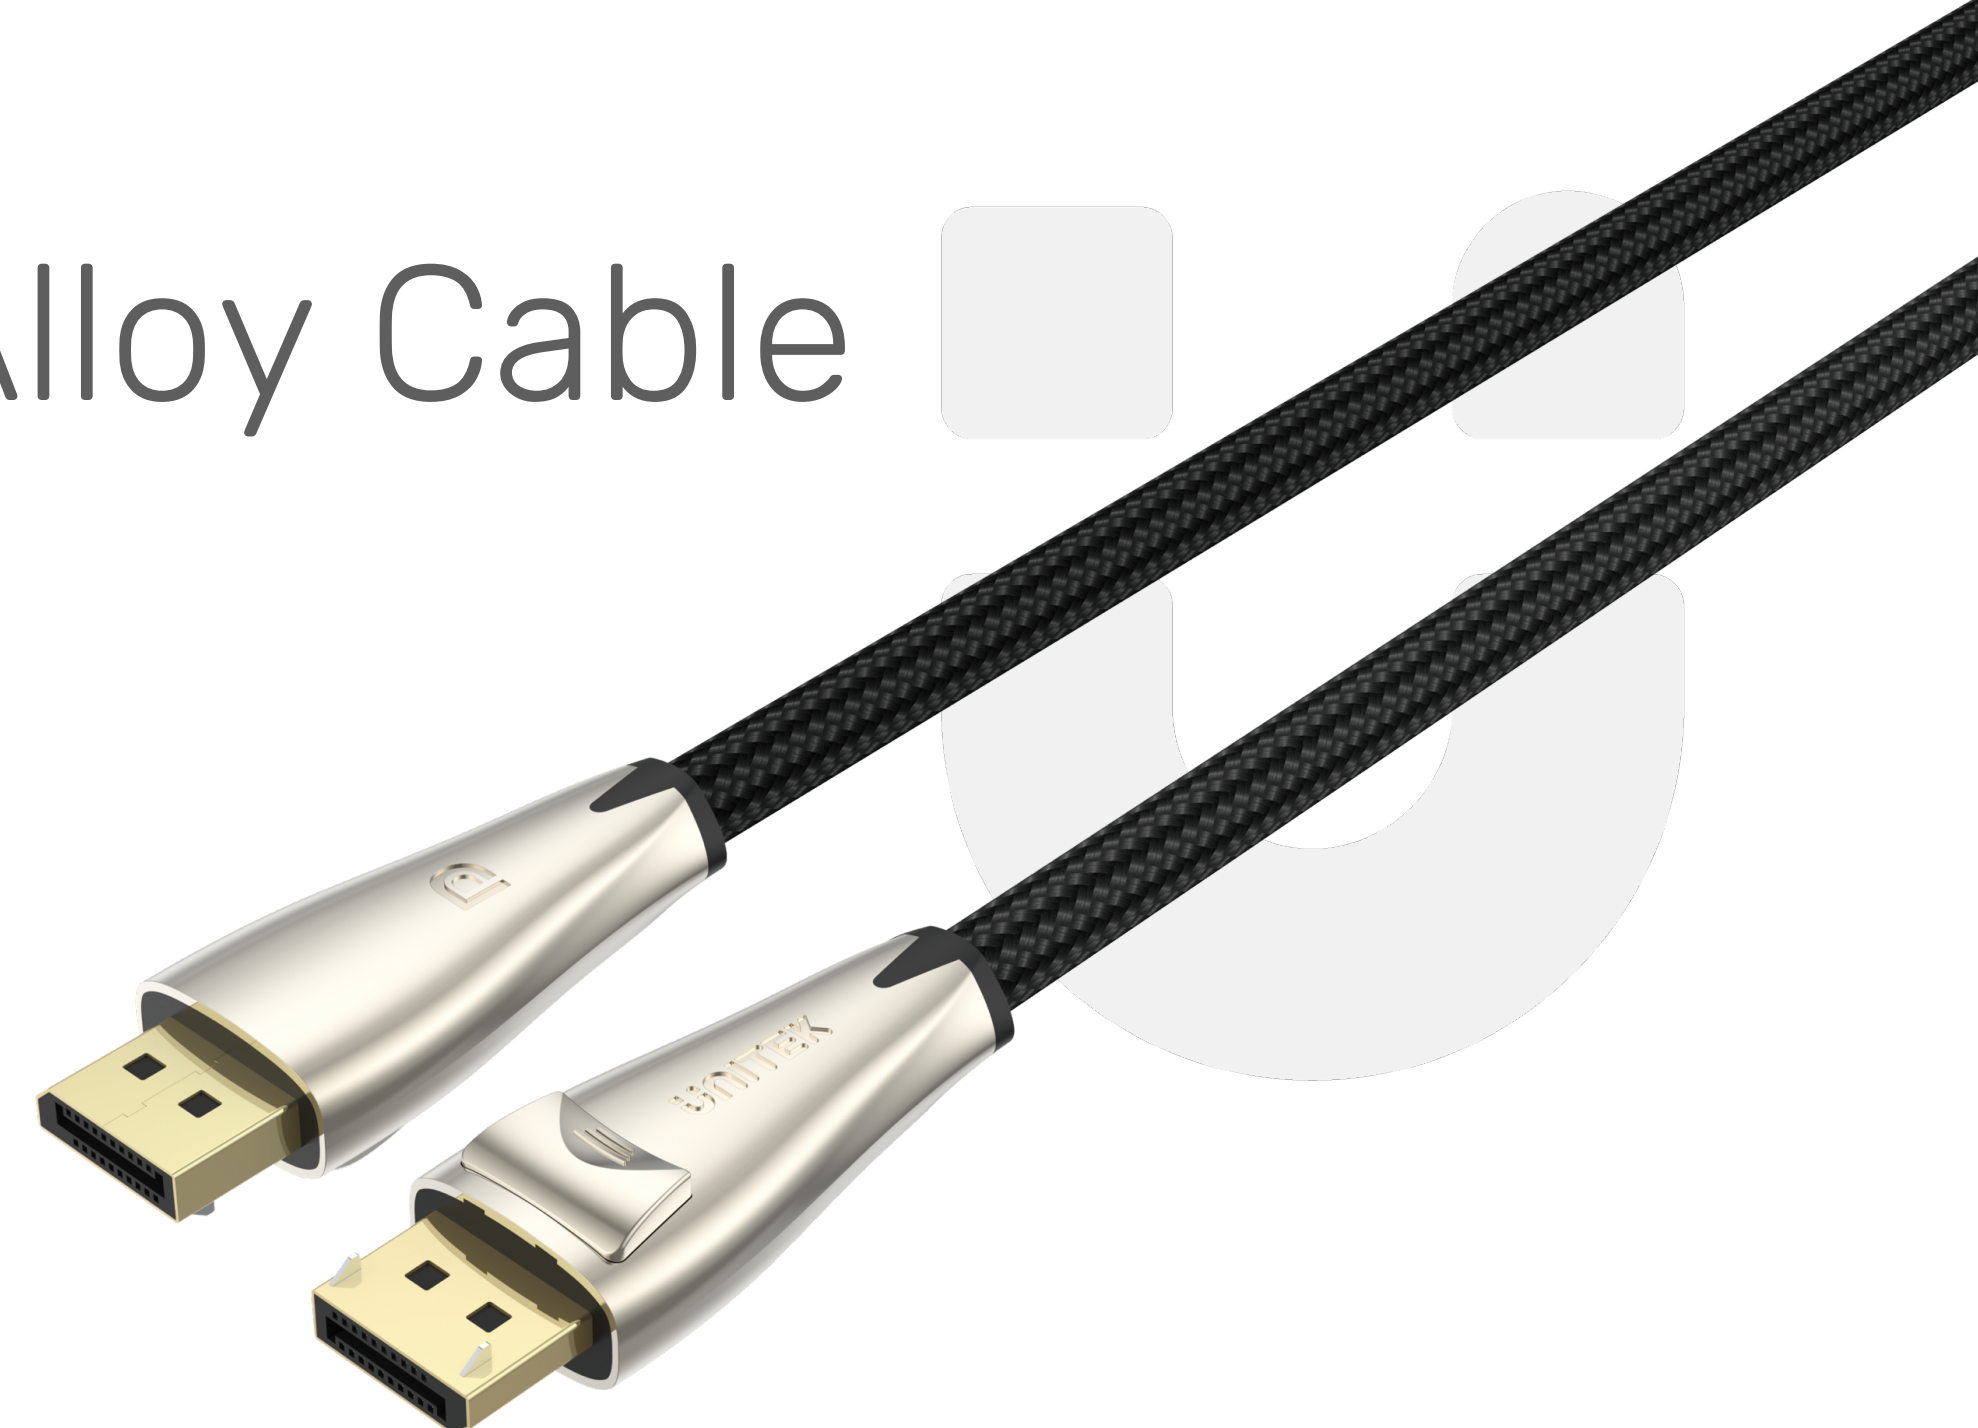

Specification

Cable Length	1M/ 1.5M/ 2M/ 3M
Cable OD	7.5mm
DP Version	DisplayPort 1.4 @8K 60Hz
Materials	Zinc-alloy housing



www.UNITEK-products.com



UNITEK Official



UNITEK Official



UNITEK Official



UNITEK-International-group-limited

UNITEK @ All Rights Reserved