HA-AD4
HA series Intercom Distributor
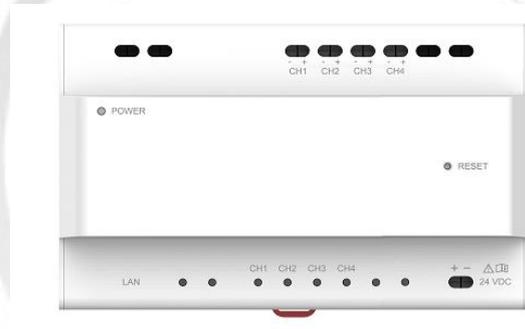
Key Feature

- 2-wire IP distributor
- 4 2-wire cascade interfaces with device power supply
- 4 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC

Specification

Device interfaces	
Network interface	1 RJ45
Two-wire interface	4
Signal indicator	4
Power indicator	1
Reset	1
General	
Power supply	Two-wire mode
Power consumption	CH1 to CH3＜6 W, CH4＜8 W
Working temperature	-10 ° C to +50 ° C (14 ° F to +122 ° F)
Working humidity	10% to 90%
Digital noise reduction	Support

Available Model

HA-AD4

HiLook

Typical Application

Door Station 1	2-Wire Distributor	Indoor Station 1
		APP Control
Door Station 2		Indoor Station 2
	Power Supply	

Legend:
- ———— Multicore cable
- ═══ 2-wire cable
- ----------- Internet
- ----------- Wi-Fi