



120 or 180 Watts,
24V Booster

IGS-402SM-4PH24

4x10/100/1000Base-T + 2x100/1000Base-X SFP w/ 4x PoE+

IGS-803SM-8PH24

8x10/100/1000Base-T + 3x100/1000Base-X SFP w/ 8x PoE+

This series models are managed industrial grade gigabit PoE (Power over Ethernet) switches with 4/8/16 10/100/1000Base-T PoE ports and 2/3/8 Gigabit/Fast SFP ports that provide stable and reliable Ethernet transmission. With dual power input design, the series models can provide redundant mechanisms for critical applications that need always-on connections. These switches can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) so as to fulfill the special needs of industrial automation applications. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networking, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

These managed switches also support a wide variety of Ethernet functions, including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple μ -Ring for redundant cabling, advanced PoE management functions such as weekly PoE power scheduling as well as device auto-checking and auto-reset. They also support layer 2 Ethernet IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostics and Green Ethernet. Additionally, these switches can also be managed by CTC Union's SmartView™ Element Management System which offers a user-friendly and centralized device management platform and provides network administrators the ability to monitor and configure these connected switches remotely.

Features

- 4x10/100/1000Base-T RJ-45+ 2x100/1000Base-X SFP with 4xPoE+, total 120W power budget (IGS-402SM-4PH24)
- 8x10/100/1000Base-T RJ-45+ 3x100/1000Base-X SFP with 8xPoE+, total 180W power budget (IGS-803SM-8PH24)
- 48VDC (44~57VDC) redundant dual input power (IGS-1608SM-8PH)
- 24/48VDC (20~57VDC) redundant dual input power with built-in very high efficiency booster (94~97%) to rise up 55 VDC for PoE output (Figure 9) (IGS-402SM-4PH24, IGS-803SM-8PH24)
- Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 9) (IGS-402SM-4PH24, IGS-803SM-8PH24)
- Provides 4/8 port IEEE802.3af / 802.3at PoE output (30W per Port)
- Advanced PoE Management, PoE PD Failure Auto Checking and auto reset when PD fail, PoE port on/off weekly scheduling, PoE configuration for power planning
- UL60950-1, CE, FCC, Rail Traffic EN50121-4, Traffic control NEMA TS2 certified
- Industrial grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Cable diagnostics, Measuring cable OK or broken point distance
- Supports Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize power consumption
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for redundant cabling
- Provides 5 ring instances that each can support μ -Ring, u-Chain

or Sub-Ring type for flexible uses (Figure 7). Supports up to 5 rings in one device (Figure 5).

- μ -Ring for Redundant Cabling, recovery time<10ms in 250 devices
- DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- QoS, Traffic classification QoS, CoS, bandwidth control for Ingress and Egress, Storm Control, DiffServ
- IEEE802.1q VLAN, MAC based VLAN, IP subnet based VLAN, Protocol based VLAN, VLAN translation, GVRP, MVR
- Dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- IGMP snooping V1/V2/V3, IGMP Filtering/ Throttling, IGMP query, IGMP proxy reporting, MLD snooping V1/V2
- Flexibility security: Port based and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Software upgrade via TFTP and HTTP, redundant firmware to avoid upgrade failure
- Supports IEEE1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- RMON, MIB II, Port mirroring, Event syslog, DNS, NTP IEEE802.1ab LLDP
- Supports IPv6 Telnet server /ICMP v6
- CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Provides SmartConfig for quick and easy mass configuration (Figure 4)
- Supports SmartView for centralized management (Figure 3)
- Supporting Central EMS for management of up to 50 SmartView Server, and maximum up to 25,000 device (Figure 5)

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex

Standard	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
Switch Architecture	Back-plane (Switching Fabric): 12Gbps(IGS-402SM-4PH24) 22Gbps(IGS-803SM-8PH24) Full wire-speed	
Data Processing	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	4x 10/100/1000Base-T RJ-45 + 2x 100/1000Base-X SFP connector (IGS-402SM-4PH24) 8x 10/100/1000Base-T RJ-45 + 3x 100/1000Base-X SFP connector (IGS-803SM-8PH24)	
	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP port support 100/1000 dual speed with DDMI	

Industrial Managed GbE PoE Switch

Console	RS-232 (RJ-45)
PoE RJ-45 Pin Assignment	4x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-402SM-4PH24) 8x IEEE 802.3af /IEEE 802.3at PoE+ (IGS-803SM-8PH24, End-Span, Alternative A mode. Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
Protocols	CSDMA/CD
Reverse Polarity Protection	Present
Overload Current Protection	Present
CPU Watch Dog	Present
Power Supply	IGS-402SM-4PH24, IGS-803SM-8PH24: Redundant Dual DC 24/48V (20~57VDC) Input power (Removable Terminal Block) Built-in very high efficiency booster(94~97%) to rise up 55 VDC for PoE output Regulated PoE output voltage (55VDC) to stabilize PoE device, and guarantee delivery PoE power distance to 100meter (Figure 9)

IGS-402SM-4PH24 Power consumption & Booser efficiency				
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
24VDC	135.2W	7.5W	120W	94.0%
48VDC	132.5W	9W	120W	97.2%

IGS-803SM-8PH24 Power consumption & Booser efficiency				
Input Voltage	Total Power Consumption	Device Power Consumption	PoE Budget	Boost Efficiency
24VDC	200.2W	9.2W	180W	94%
48VDC	195.1W	9.8W	180W	97%

PoE Power Budget	Maximum PoE Output power budget 30W / Per Port 120W (IGS-402SM-4PH24) 180W (IGS-803SM-8PH24)
LED	Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber) SFP Fiber Per port: Link/Active (Green) PoE Port LED 1 LED /per Port : • PoE Output Power On : ON (Green) • PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times /sec (Green) • PoE Output Power Off : Off
Jumbo Frame	9.6KB

Software Specifications

Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN(Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE802.1d STP, IEEE802.1w RSTP, IEEE802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, u-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings (Figure 5,6,7). Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250.
Loop Protection	Present
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network

IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)
MAC Address Table	8K
Memory Buffer	512K Bytes for packet buffer
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin
Operating Temperature	-10 ~ 60°C (IGS-402SM-4PH24, IGS-803SM-8PH24, -40 ~ 75°C (IGS-402SM-4PHE24, IGS-803SM-8PHE24
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H) (IGS-402SM-4PH24) 106 x 72 x 152 mm (D x W x H) (IGS-803SM-8PH24)
Weight	0.715kg (IGS-402SM-4PH24) 0.96kg (IGS-803SM-8PH24)
Installation Mounting	DIN Rail mounting or wall mounting
MTBF	276,161Hrs (IGS-402SM-4PH24) 311,376Hrs (IGS-803SM-8PH24) (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic	EN50121-4
Traffic control	NEMA TS2 (IFS-402GSM-4PH24, IFS-803GSM-8PH24)
Immunity for Heavy Industrial Environment	EN61000-6-2
Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


QoS Features	
Class of Service	IEEE802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Rate in steps : 1 kbps / Mbps / fps / kfps Range : 100 kbps to 1Gbps / 1fps to 3300kfps Rate Unit : bit or frame
Bandwidth Control for Egress	Rate in steps : 1 kbps / Mbps Range : 100 kbps to 1Gbps Rate Unit : bit Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port

Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4
RADIUS authentication & accounting TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	
SSL / SSH v2	
User Name	Local Authentication
Password	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
SW & Configuration Upgrade	TFTP, HTTP
RMON	Redundant firmware in case of upgrade failure
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	
DHCP	Server Client Relay Snooping Snooping option 82 Relay option 82
IP Source Guard	
Port Mirroring	
Event Syslog	Syslog server (RFC3164) (Support 1 server)
Warning Message	System syslog, e-mail, alarm relay


DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP	
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	
HTTP over IPv6	
SSH over IPv6	
IPv6 Telnet Support	
IPv6 NTP Support	
IPv6 TFTP Support	
IPv6 QoS	
IPv6 ACL	Number of rules: up to 256 entries L2 / L3 / L4
Others Features	
Green Ethernet	Supports IEEE802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables
Green Ethernet	Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring cable normal or broken point distance
Advanced PoE Management	
	PoE PD failure auto checking ,and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budget limitation (maximum 120W for IGS-402SM-4PH24 ,180Wfor IGS-803SM-8PH24, 240W for IGS-1608SM-8PH) Power feeding priority

Application

► Figure 1 : Application Example

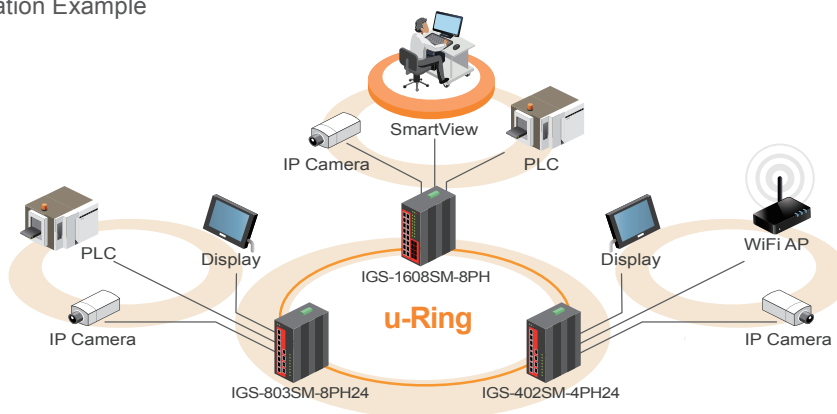


► Figure 2 : Central EMS allows central management of up to 50 SmartView™ servers

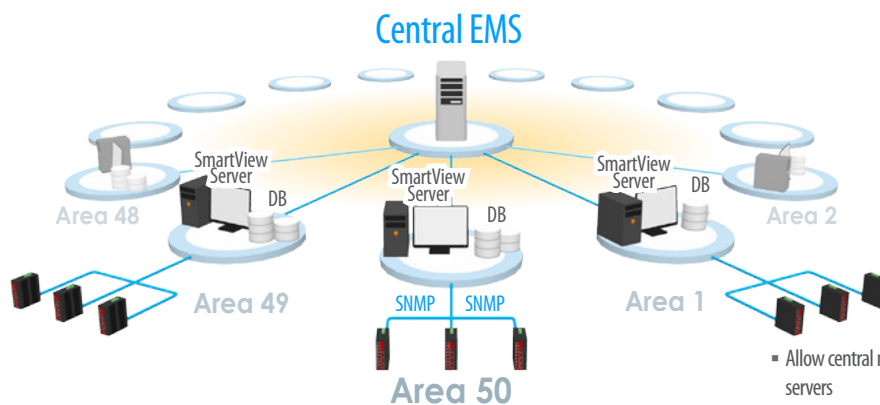


- Allow central management of up to 50 SmartView™ servers
- Allow up to 25,000 devices management
- Hierarchical Network Management Architecture
- Easy and rapid expansion of SmartView™ EMS


► **Figure 3 : SmartView™**

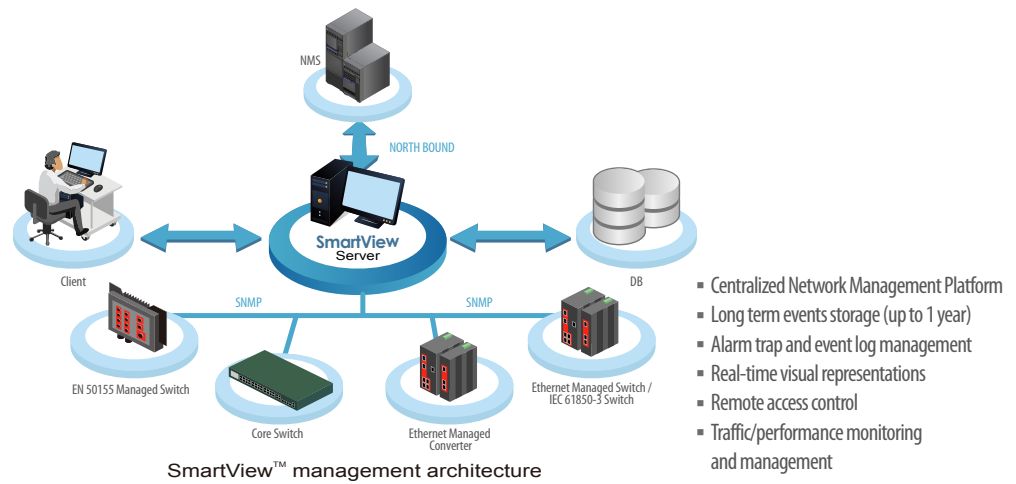

► **Figure 4 : SmartConfig™** is a convenient configuration tool for mass deployment of switch products

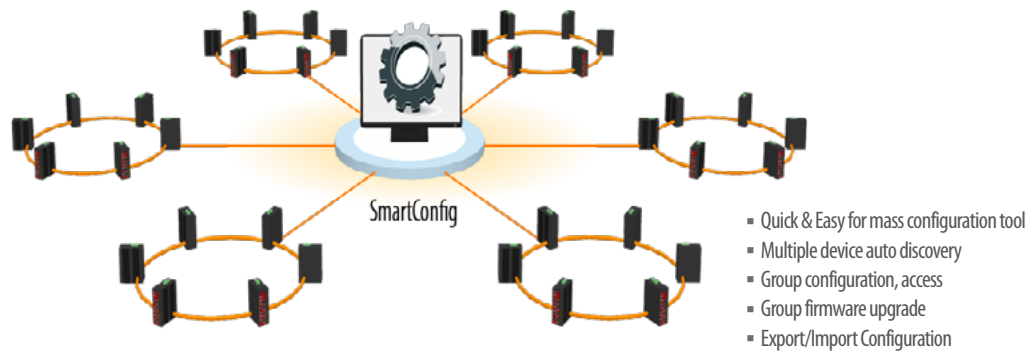

► **Figure 5 : Multiple μ-Ring**

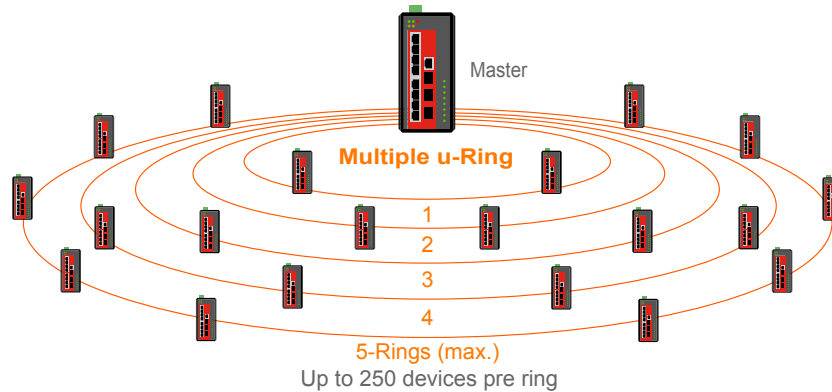

► **Figure 6 : Friendly to set μ-Ring configuration in Web**


u-Ring Configuration Auto-refresh Refresh

Delete	Instance	Type	Master	East		West	
				Port	Edge	Port	Edge
Delete	1	u-Ring	<input type="checkbox"/>	1		2	
Delete	2	u-Ring	<input type="checkbox"/>	4		3	
Delete	3	u-Ring	<input type="checkbox"/>	10 (Fiber2)		11 (Fiber3)	
Delete	4	Sub-Ring	<input type="checkbox"/>	6			
Delete	5	u-Chain	<input type="checkbox"/>	5	<input type="checkbox"/>	9 (Fiber1)	<input type="checkbox"/>

Add New Instance

Save Reset


► Figure 7 : μ -Ring Type

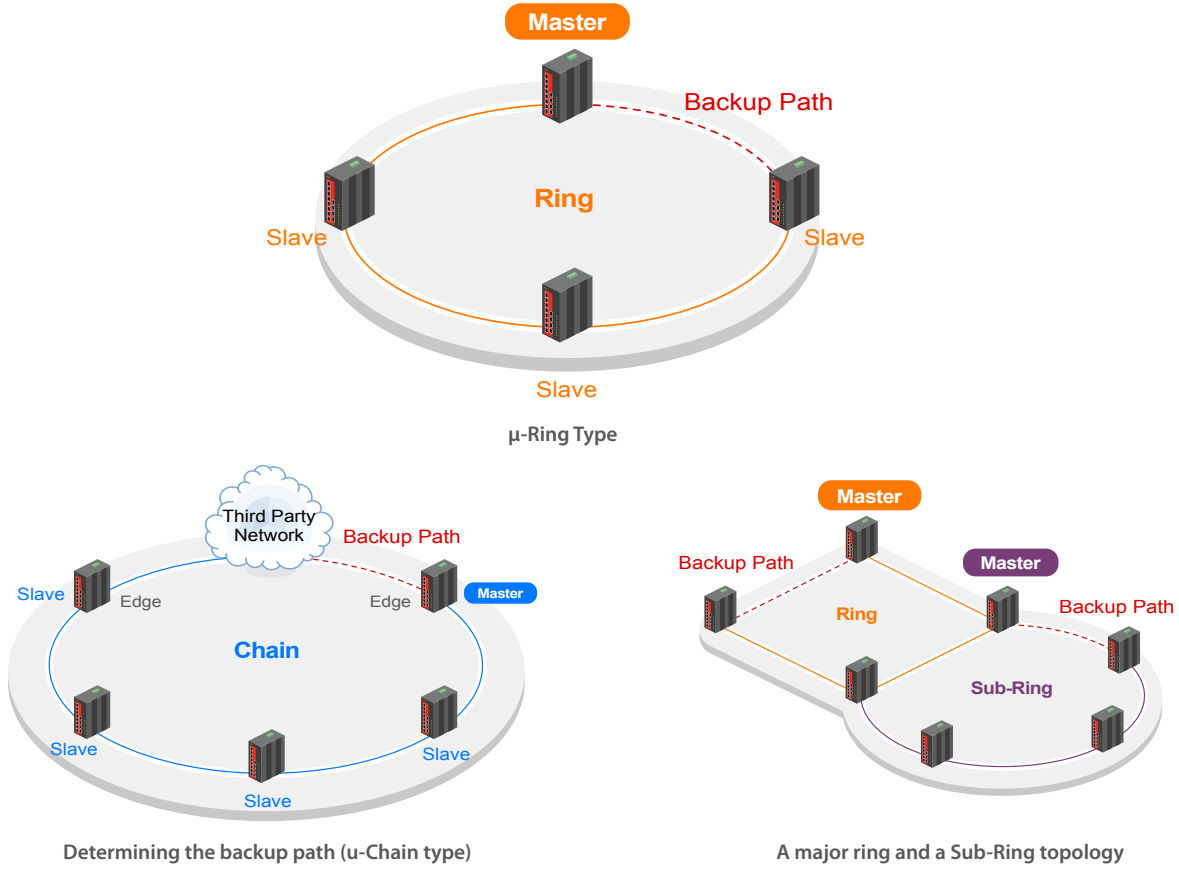

► Figure 8 : Ring Configuration Example


Ring Configuration Type

- u-Ring
- Sub-Ring

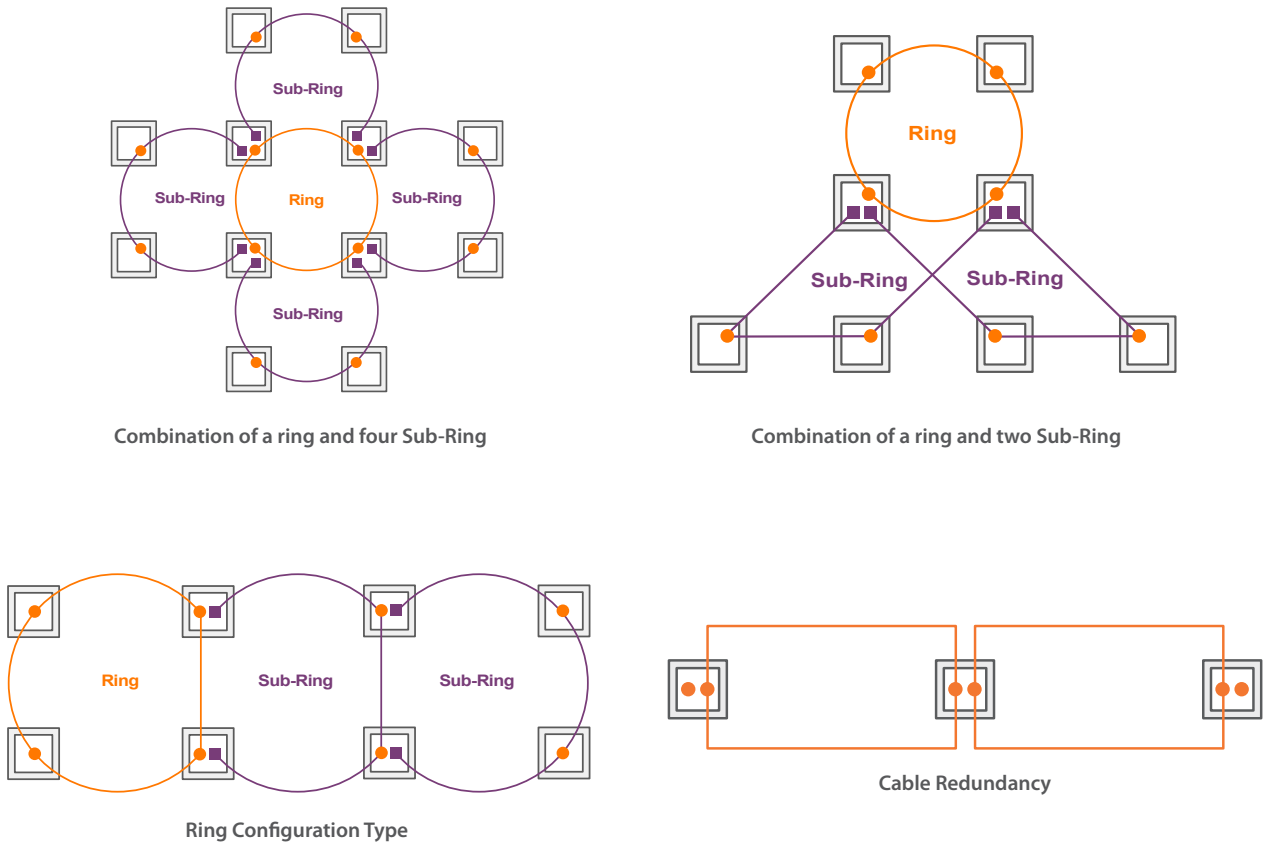

Industrial Managed GbE PoE Switch


► **Figure 9** : High efficiency boost technology for PoE

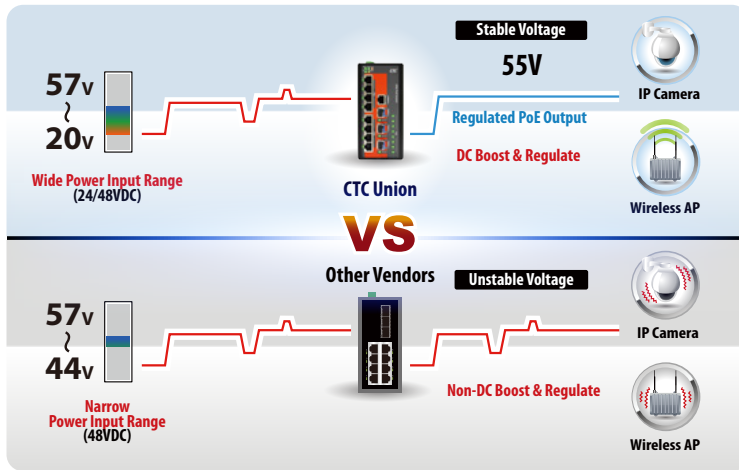


- Regulated PoE output voltage (55VDC) to stabilize PoE device
- Guarantee delivery PoE power distance to 100 meter
- Wide range input power 24/48VDC (20~57VDC)
- Built-in very high efficiency (94~97%) to boost PoE output voltage

Dimensions

► IGS-402SM-4PH24

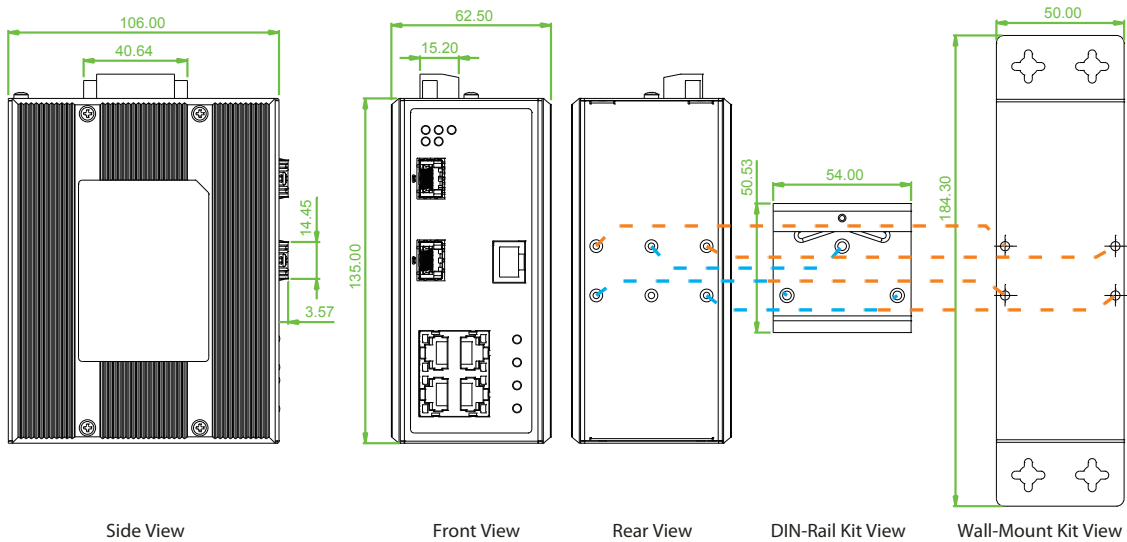


► IGS-803SM-8PH24

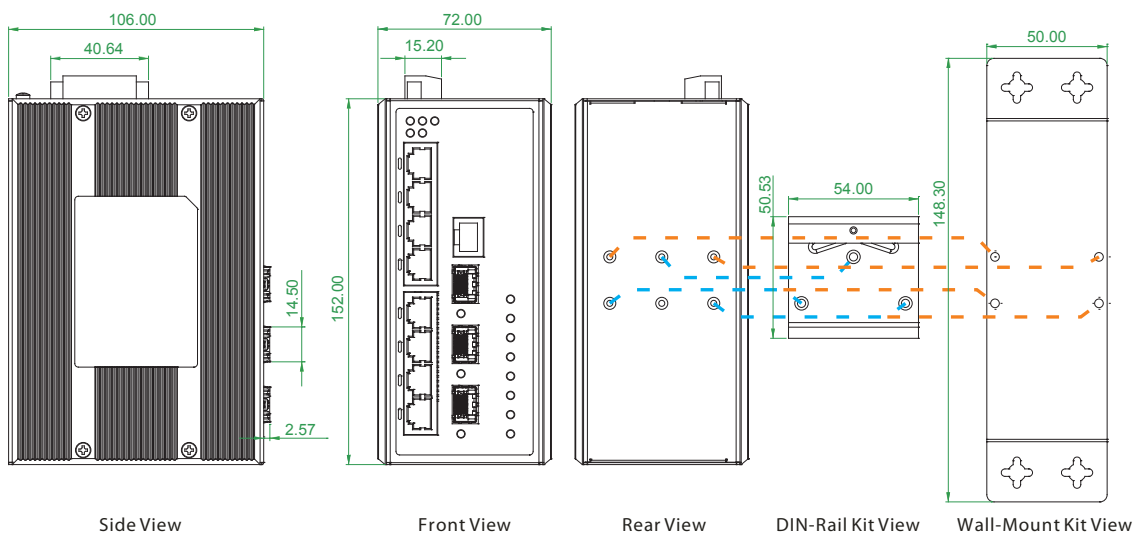

Ordering Information

Model Name	Managed	Total Port	UTP		Fiber		PoE Port		Input power		Certification				Operating Temperature
			10/100/1000 Base-T	100/1000 Base-X	IEEE802.3at	Power Budget	24/48VDC or 48VDC	Railway EN50121-4	Traffic Control NEMA TS2	Safety UL60950-1	EN61000-6-2	EN61000-6-4	CE, FCC		
IGS-402SM-4PH24	V	6	4	2 SFP	4	120W	24/48VDC	V	V	V	V	V	V	-10~60 C	
IGS-402SM-4PHE24	V	6	4	2 SFP	4	120W	24/48VDC	V	V	V	V	V	V	-40~75 C	
IGS-803SM-8PH24	V	11	8	3 SFP	8	180W	24/48VDC	V	V	V	V	V	V	-10~60 C	
IGS-803SM-8PHE24	V	11	8	3 SFP	8	180W	24/48VDC	V	V	V	V	V	V	-40~75 C	
IGS-1608SM-8PH	V	24	16	8 SFP	8	240W	48VDC	V	V	V	V	V	V	-10~60 C	
IGS-1608SM-8PHE	V	24	16	8 SFP	8	240W	48VDC	V	V	V	V	V	V	-40~75 C	

Model Naming Rule

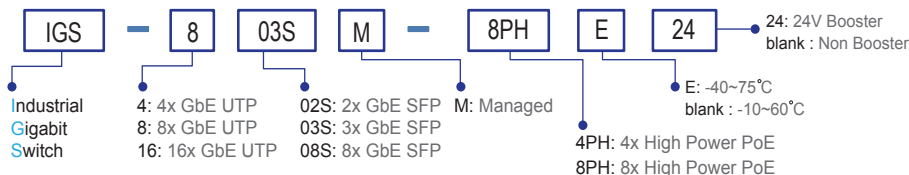

Optional Accessories

Industrial Power Supply


DR-120-24	Industrial Power, Input 88 ~ 132VAC / 176 ~ 264VAC, Output 24VDC, 120W, -10 ~ +60°C
DRP-240-48	Industrial Power, Input 85 ~ 264VAC, Output 48VDC, 240W, -10 ~ +70°C

Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)
(Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)
ISFP-T3T00-MA-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Master, -10~70°C (-40~85°C)
ISFP-T3T00-SL-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Slave, -10~70°C (-40~85°C)

SFP Naming Rule

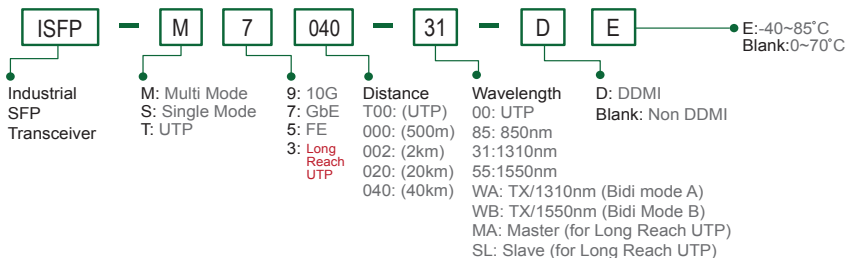

Package List

- One of the series device
- Console cable (RJ-45 to DB9)
- CD (SmartConfig, MIB file, Manual)
- Quickly installation guide
- Din Rail with screws
- Wall mount bracket with screws
- Terminal block
- Protective caps for SFP ports