

WALL MOUNT ENCLOSURE & FIBRE DOME ENCLOSURE

Wall Mount Fibre Enclosures

MODEL CODE	TYPE
FWE-12C	Fibre Termination Enclosure up to 12 core
FWE-24C	Fibre Termination Enclosure up to 24 core

The FWE-12 and FWE-24 series wall mount boxes are robust fibre termination boxes designed to assist and protect the fibre splice connections of 12 and 24 cores respectively. This unique design eliminates the need for fibre couplers. Instead long 2mm or 3mm fibre pigtails are used to connect the splice directly into the active networking device.

FWE-12C FEATURES

- Includes 2x stacked splice cassettes each capable of 6 cores (12 core max.)
- Mechanical strength housing is made from polycarbonate plastic
- No fibre joiners or adapters required
- Dimensions: 200 x 110 x 44 mm (LxWxD)

FWE-24C FEATURES

- Includes 4x stacked splice cassettes each capable of 6 cores (24 core max.)
- Mechanical strength housing is made from polycarbonate plastic
- No fibre joiners or adapters required
- Dimensions: 270 x 150 x 55 mm (LxWxD)





DYNAMIX™

Wall Mount Fibre Enclosure - 4 Slot

MODEL CODE	ACCESSORIES	DESCRIPTION
PP-FSTW-4PV2	PP-FST-PG16 PP-FP-4PB PP-FP-4PSCD4 PP-FP-4PLCS6 PP-FP-4PSTS6 PP-FST-CASV3	Cable Gland for Fibre Panels Blank Plate - Black Colour SC Duplex 4 Port Plate SC Simplex/LC Duplex 6 Port Plate ST Simplex 6 Port Plate Fibre Splice Cassette

FEATURES

- Lockable wall mount fibre enclosure with hinged doors
- 4 Slots available for SC/ST/LC/FC/MTRJ Duplex and Simplex snap-in plates
- Supplied with a 12 way splice cassette, can stack up to 2 cassettes
- Splice cassette caters for 900µm and 3mm pigtails
- Supplied with cable management modules
- Fibre cable entry point
- Material: Cold rolled steel
- Colour: Black
- Dimensions : 350 x 300 x 80 mm (WxHxD)

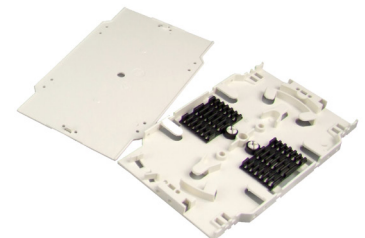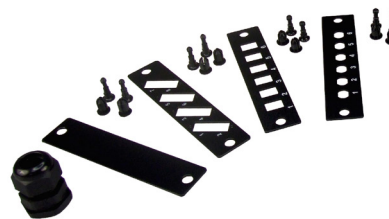

DYNAMIX™