

VOICE RATED PATCH PANEL

PP-25V2 / PP-50V2

ISDN Category 3 patch panel is high-density telecommunication panel with 25 and 50 standard RJ45 jacks. The panel meets all latest standards and electrical parameters and is designed for termination of two pair cable on dual type 110/Krone termination blocks. Printed circuit board together with high quality components ensures the Category 3 performance. Integrated back cable management for separate cables provides organized and secure installation.



PP-25V2 - 25 Port

FEATURES:

- Dual type 110 & Krone punch down termination blocks
- Printed circuit board together with high quality components ensures the Category 3 performance.
- All versions can be mounted on 1RU19" EIA racks.
- All ports are numerically identified.

STANDARDS COMPLIANCE


- ANSI/TIA/EIA 568B Category 3
- ISO/IEC 11801
- EN 50173-1

APPLICATION

- Suitable for voice applications
- Analog voice and digital voice (VoIP)
- Analog (broadband, baseband) and Digital video.



PP-50V2 - 50 Port

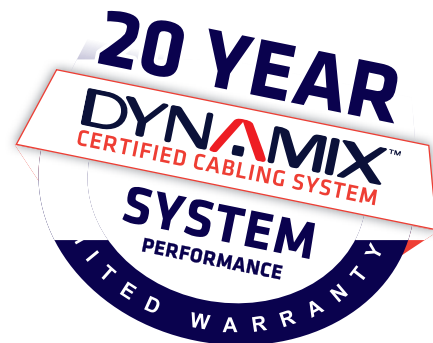

ORDERING INFORMATION

PP-25V2	ISDN(Cat.3) 90°Unshielded Patch Panel, Dual type IDC,5/25 ports
PP-50V2	ISDN(Cat.3) 90°Unshielded Patch Panel, Dual type IDC,10/50 ports