

45RU CO-LOCATION SERVER CABINETS

DESCRIPTION


Our DYNAMIX SR series Co-Location network server cabinet has 45U of usable space in 2 or 3 compartments. Each compartment has its own secure space with unique key locks to protect from unauthorized access. The DYNAMIX Co-Location cabinet is secure and self-contained which allows several tenants to share a single cabinet. An ideal solution to protect sensitive electronic networking equipment such as your server, network and telecommunications equipment in a sturdy, stable and mobile rack cabinet constructed from highly durable heavy-gauge steel. Front and rear mesh doors provide additional air circulation and venting. Fully adjustable mounting rails and square mounting holes can accommodate various depth rack equipment. Cabinet comes fully assembled and supplied complete including pre-installed 2.5" heavy-duty caster wheels and levelling feet, locking system, earthing wires for front and rear doors, removable lockable side panels, 4x cooling fans trays.

FEATURES

- Supplied with fixed shelves, 4x fans, 25x cage nuts, castors, levelling feet, earthing wires
- Static loading: 800kg
- Width: 800mm
- Depth: 800mm/1000mm
- Vertical mounting profile can be adjusted in 25mm increments
- Supplied fully assembled
- SPCC quality cold rolled steel with easy clean surface
- Mounting profile 2.0mm, mounting angle 1.5mm, others 1.2mm
- Surface finish: Degrease, acid pickling, rust prevention, parkerizing, pure water cleaning and static electricity plastic painting
- Complies with IEC-60297, ANSI/EIA RS-310-D, IEC297-2, DIN41491; PART1, DIN41494; PART7, GB/T3047.2-92, IP20 rated
- Compatible with 19" International standard and metrical and ETSI standards
- 2 Year warranty on cabinets. Subject to use within the static loading specifications and operation within normal environmental conditions
- 1 Year warranty on fans



800mm Wide models feature dual front mounted 100mm hinged vertical cable management bars

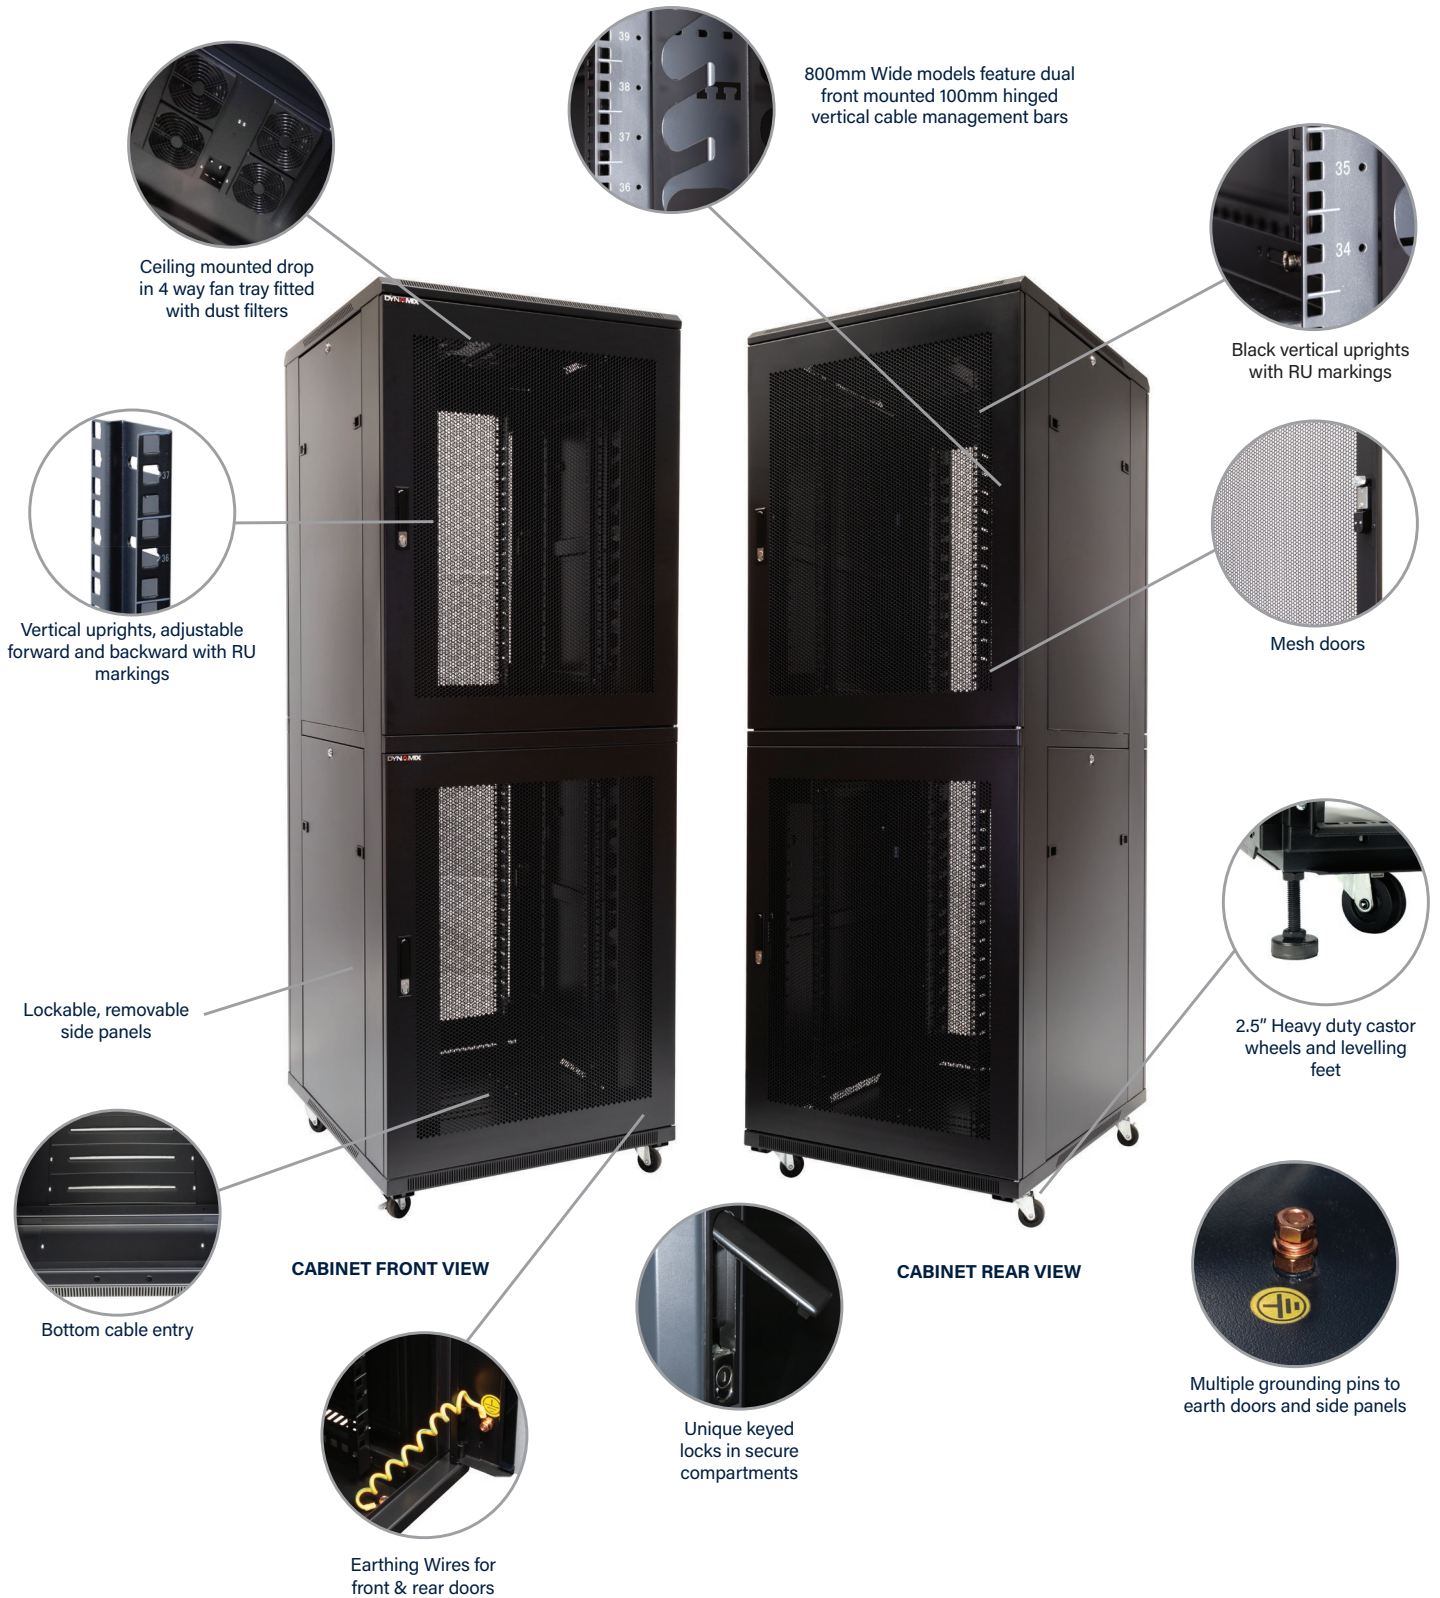

Ceiling mounted drop in 4 way fan tray fitted with dust filters

800mm Wide models feature dual front mounted 100mm hinged vertical cable management bars

Black vertical uprights with RU markings

Vertical uprights, adjustable forward and backward with RU markings

Mesh doors

Lockable, removable side panels

2.5" Heavy duty castor wheels and levelling feet

CABINET FRONT VIEW

CABINET REAR VIEW

Bottom cable entry



Multiple grounding pins to earth doors and side panels

Earthing Wires for front & rear doors

Unique keyed locks in secure compartments

MODEL CODE	W X D X H (EXTERNAL)	HEIGHT	FIXED SHELVES	DEFAULT RAIL DEPTH	M ³	kg
RSR45-CL2-8X8	800 x 800 x 2210mm	45RU	2	574	1.88	149
RSR45-CL2-8X10	800 x 1000 x 2210mm	45RU	3	774	2.14	169
RSR45-CL3-8X8	800 x 800 x 2210mm	45RU	3	574	1.88	149
RSR45-CL3-8X10	800 x 1000 x 2210mm	45RU	3	774	2.14	169

RSR45-CL28X10: Dimensional Frame

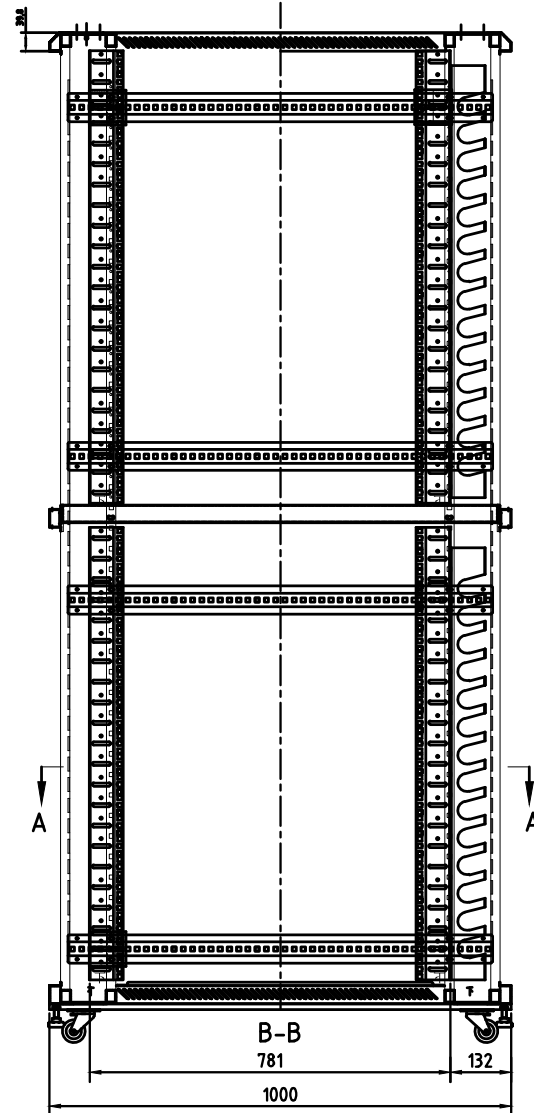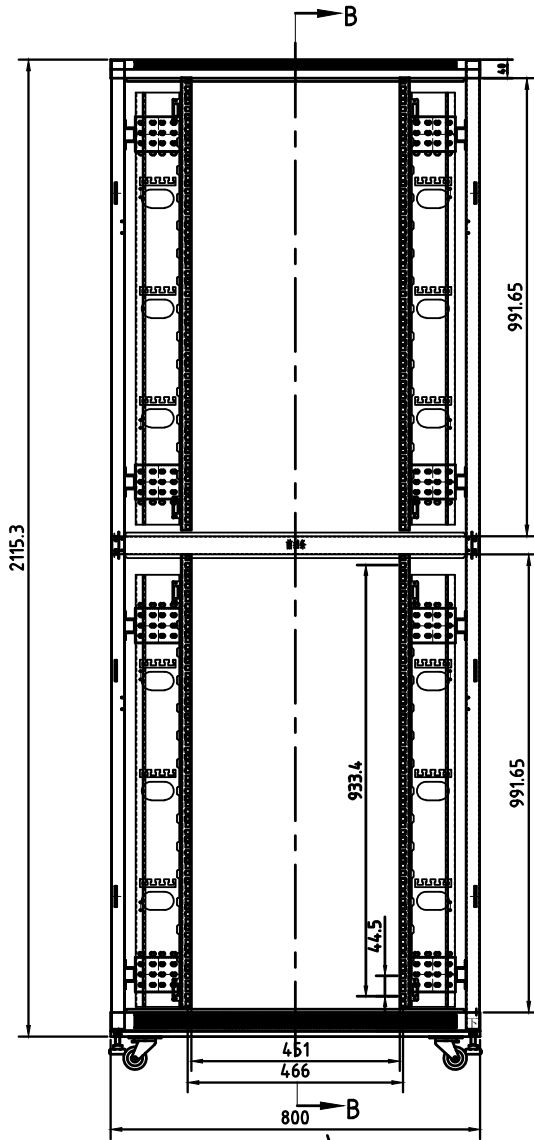

ALSO AVAILABLE:

<p>RSPL8X8</p>  <p>SR Series Cabinet Plinth. 100mm high. Suits 800 x 800mm SR server cabinet.</p>	<p>RSPL8X10</p>  <p>SR Series Cabinet Plinth. 100mm high. 800 x 1000mm SR server cabinet.</p>	<p>RABK</p>  <p>Baying Kit for RSR series cabinet. 4 pieces per pack.</p>	<p>RAFS-800</p>  <p>Fixed Shelf for 800mm Deep Cabinet, Black, Shelf measures 550mm deep, (Max load: 60kg)</p>
---	---	--	--

Please note we took the up-most care to compile the information in this datasheet. To the best of our knowledge all info provided were correct at the time of creation. Should any specs change we try to update info accordingly. Information are subject to change without notice. In the case that you find any irregularity please inform our team at contactus@dynamix.co.nz

Last updated: 12 November 2020