

10GBase-T SFP+ Transceiver Hot Pluggable, RJ-45, Active Copper SFP+, 30M

Part number: SFP+10GB-T



Overview:

The SFP+10GB-T Small Form Factor Pluggable SFP+ Copper transceivers are compliant with the current SFP+ Multi-Source Agreement (MSA) Specification. The high performance designed is integrated full duplex data link at 10Gbps over four pair Category 6a/7 cable up to 30m links. It is specifically designed for high speed communication links that require 10 Gigabit Ethernet over copper cable.

Applications:

- 1G/ 2.5G/ 5G/ 10GBase-T Application
- High speed I/O for file server
- Mass storage system I/O
- Bus extension application

Features:

- Compliant with IEEE 802.3az, 802.3ab and 802.3 standard
- Compliant with SFP+ MSA (SFF-8431, SFF-8432)
- Support 10GBase-T/ 5GBase-T/ 2.5GBase-T/ 1000Base-T
- Hot Pluggable
- Auto-negotiates with other 10GBase-T PHYs
- Auto-detect MDI/MDI-X
- Support RX_LOS function
- I2C 2-wire interface for serial ID and PHY register access
- RJ-45 connector
- Single +3.3V power supply
- 10G link length up to 30m with Cat.6a/7, 2.5G/5G link length up to 50m with Cat.5E, 1G link length up to 100m with Cat.5E
- RoHS Compliant

Absolute Maximum Ratings :

Parameters	Symbol	Min.	Max.	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Supply Voltage	V _{CC}	-0.5	+4.0	V
Storage Relative Humidity	RH	5	95	%

Recommended Operating Conditions

Parameters	Symbol	Min.	Typ.	Max.	Unit
Case Operating Temperature	T _{OP}	0	-	+70	°C
Supply Voltage	V _{CC}	+3.13	+3.3	+3.47	V
Supply Current	I _{CC}			880	mA
Power Consumption @30m	P _{cw}			2.9	W

General Specifications :

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Data Rate	DR	1	10.3125		Gb/sec	
Bit Error Rate	BER			10 ⁻¹²		

High-Speed Electrical Interface, Host to SFP+

V_{CC}= 3.13V to 3.47V, T_{OP} = 0 °C to 70 °C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
TD+, TD- Input Voltage Swing	V _{IN+} / V _{IN-}	250		1200	mV	1
RD+, RD- Output Voltage Swing	V _{out+} / V _{out-}	350		800	mV	1
Rise Time (Receiver)	T _r		175		ps	2
Fall Time (Receiver)	T _f		175		ps	2
Tx Input Impedance	Z _{in}		50		Ohm	1
Rx Output Impedance	Z _{out}		50		Ohm	1

Note1: Single ended

Note2: 20% to 80% value


High-Speed Electrical Interface, Cable to SFP+

V_{CC}= 3.13V to 3.47V, T_{OP} = 0 °C to 70 °C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
TX Output Impedance	Z _{out.TX}		100		Ohm	1
RX Output Impedance	Z _{in.RX}		100		Ohm	1

Note1: Differential for frequencies ranging from 125MHz to 10.3125GHz

Pin Assignment :

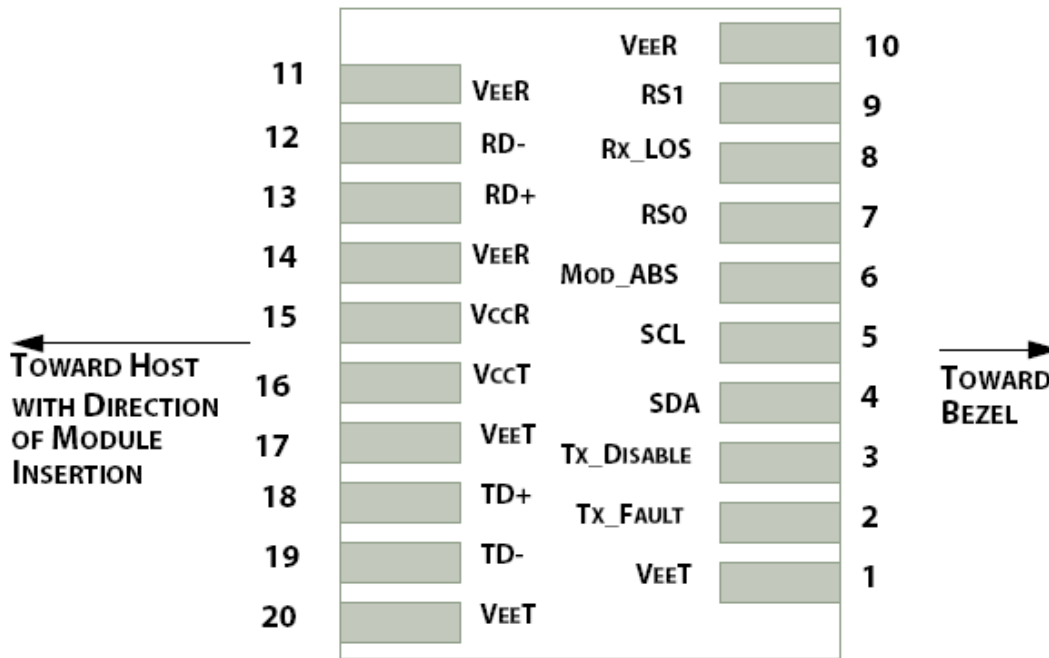

Host PCB SFP+ pad assignment top view

Pin Description :

Pin	Name	Function / Description
1	VeeT	Transmitter Ground
2	TX_Fault	Transmitter Fault Indication (1)
3	TX_Disable	Transmitter Disable – Turns off transmitter laser output (2)
4	SDA	2-wire Serial Interface Data Line (SDA: Serial Data Signal) (3)
5	SCL	2-wire Serial Interface Clock (SCL: Serial Clock Signal) (3)
6	Mod_ABS	Module Absent, connected to VeeT or VeeR in the module (3)
7	RS0	Rate Select 0, optionally controls SFP+ module receiver (5)
8	Rx_LOS	Receiver Loss of Signal Indication (4)
9	RS1	Rate Select 1, optionally controls SFP+ module transmitter (5)
10	VeeR	Receiver Ground
11	VeeR	Receiver Ground
12	RD-	Receiver Inverted Data output, Differential LVPECL, AC coupled
13	RD+	Receiver Non-Inverted Data output, Differential LVPECL, AC coupled

14	VeeR	Receiver Ground
15	VccR	Receiver 3.3V Power Supply
16	VccT	Transmitter 3.3V Power Supply
17	VeeT	Transmitter Ground
18	TD+	Transmitter Non-Inverted Data Input, Differential LVPECL, AC coupled
19	TD-	Transmitter Inverted Data Input, Differential LVPECL, AC coupled
20	VeeT	Transmitter Ground

Note1: TX Fault is not used and is always tied to ground through a 100 ohm resistor.

Note2: TX Disable as described in the MSA is not applicable to the Copper-T module, but is used for convenience as an input to reset the internal PHY IC. This pin is pulled up within the module with a 4.7K Ω resistor.

Low (0 – 0.8 V): Transceiver on ;

Between (0.8 V and 2.0 V): Undefined

High (2.0 – 3.465 V): Transceiver in reset state


Open: Transceiver in reset state

Note3: These are the module definition pins. They should be pulled up with a 4.7K~10K Ω resistor on the host board to supply less than VccT+0.3V or VccR+0.3V. Mod-ABS is grounded by the module to indicate that the module is present.

Note4: LVTTTL compatible with a maximum voltage of 2.5V.

Note5: No connect on this module.

Mechanical Dimensions :

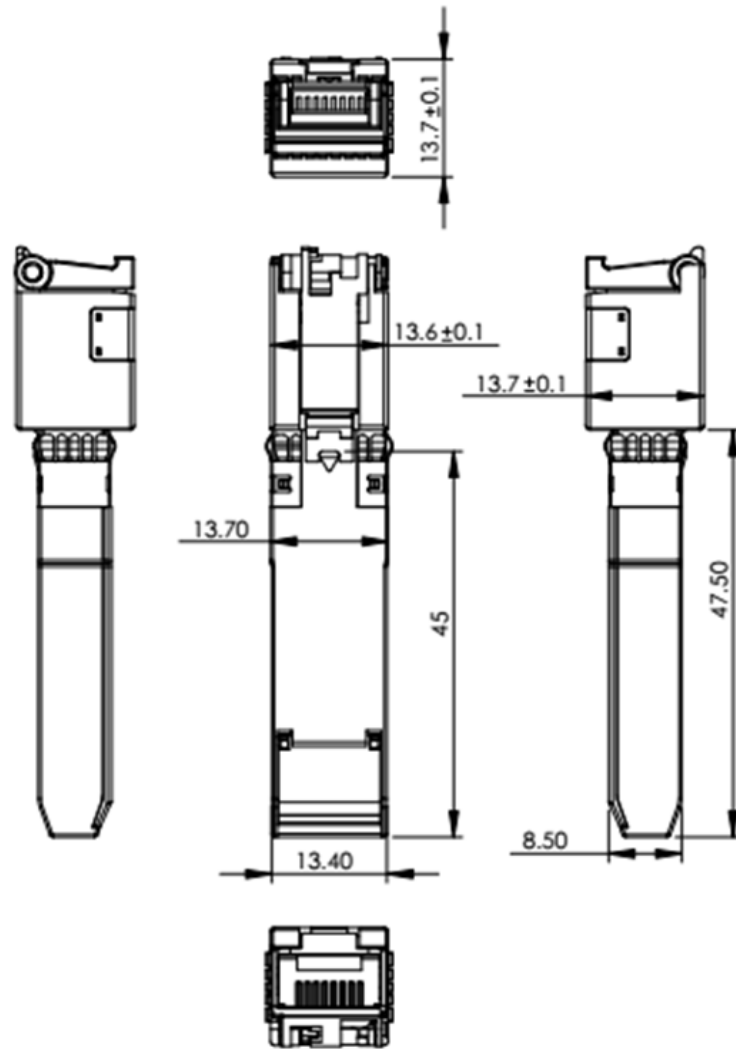

(All Dimensions are ± 0.20 mm Unless Otherwise Specified, Unit: mm)

Ordering Information :

Part No.	Speed mode	Link	Temp.
SFP+10GB-T	10GBase-T @Cat.6a/7 cable	30 meters	0~70°C
	5GBase-T/2.5GBase-T @Cat.5E cable	50 meters	
	1000Base-T @Cat.5E cable	100 meters	